



THE NETHERLANDS
(N E D E R L A N D)



COMMUNICATION

Concerning ⁽¹⁾:

- ~~approval granted~~
- approval extended
- ~~approval refused~~
- ~~approval withdrawn~~
- ~~production definitely discontinued~~

of a type of tyre with regard to rolling sound emission level pursuant to Regulation No. 117.

Approval number: E4-117R-013068-S

Extension number: 01

Approval mark:



013068 S

- | | | |
|--|---|--|
| 1. Manufacturer's name and address(es) | : | GITI Tire (Anhui) Company Ltd.
No.8, ShiXin Road
231202, Hefei
P.R.China |
| 2. If applicable, name and address of manufacturer's representative: | : | not applicable |
| 3. "Tyre class" and "category of use" of the type of tyre | : | Class C1/ Class C2 / Class C3
normal/snow/ special |
| 4. Brand(s) name(s) and Trade description(s) of the type of tyre | : | GT RADIAL (Trademark)
KargoMax ST-6000 (Tread pattern) |
| 5. Technical service and, where appropriate, test laboratory approved for purposes of approval or of verification of conformity tests | : | TÜV NORD Mobilität GmbH & Co. KG
Institut für Fahrzeugtechnik und Mobilität
Adlerstr. 7
D-45307 Essen |
| 6. Sound level of the representative tyre size, see paragraph 2.5. of Regulation No. 117, as 2.7. of the test report at reference speed of 70 /80 km/h ⁽¹⁾ | : | <u>195/60R12C 104/102N 70 dB(A)</u>
<u>225/75R16C 121/120N 71 dB(A)</u> |



7. Wet adhesion level of the representative tyre size, see paragraph 2.5. of Regulation No. 117, as per item 7. of the test report in the Appendix to Annex 5, using vehicle or trailer method : not applicable
8. Number of report issued by that service : CS117-A0-2011-01144
CS117-B0-2012-01324
9. Date of report issued by that service : July 08, 2011
August 16, 2012
10. Reason(s) of extension (if applicable) : additional test size
11. Any remarks : ---
12. Place : Zoetermeer
13. Date : 06-SEP-2012
14. Signature :



The image shows a blue ink signature of R.F.R. Clement written over a circular stamp. The stamp contains the RDW logo, which features a crown and a shield with a lion, and the text 'RDW' below it. The signature is written in a cursive style and extends across the right side of the stamp.

15. Annexed to this communication are

15.1. A list of documents in the approval file deposited at the Administration services having delivered the approval and which can be obtained upon request.

15.2. A list of tread-pattern designations: Specify for each trademark or brand name and trade description the list of tyre size designations adding, in the case of Class C1 tyres, the mark "Reinforced" or "Extra Load", or the speed symbol of snow tyres, if so required by paragraph 3.1. of this regulation. if applicable.

⁽¹⁾ Strike out what does not apply

GITI TIRE (ANHUI) COMPANY LTD.

Information folder No. s120701

Page 3 of 5

List of tyre size

Brand name(s) or Trade mark(s) : GT RADIAL
Tread pattern : KargoMax ST-6000

Tyre size	Approval No.	Limit dB(A)	Wet grip index(G)	Indication
155R13C 91/89N	E4-0024128	75	—	—
155R13C 90/88N	E4-0018412			
165R13C 96/94N	E4-0018413			
185R14C 104/102N	E4-0018414			
195/60R12C 104/102N	E4-0018415			
195/70R14C 104/102N	E4-0018416			
195/70R15C 104/102N	E4-0018417			
<u>225/75R16C 121/120N</u>	E4-0025744			

Test Size : **195/60R12C 104/102N**
E4-0018415

Because of : ~~Widest~~
~~Lowest aspect ratio~~
~~Biggest rim size~~

Test Size : **225/75R16C 121/120N**
E4-0025744

Because of : ~~Widest~~
~~Lowest aspect ratio~~
~~Biggest rim size~~

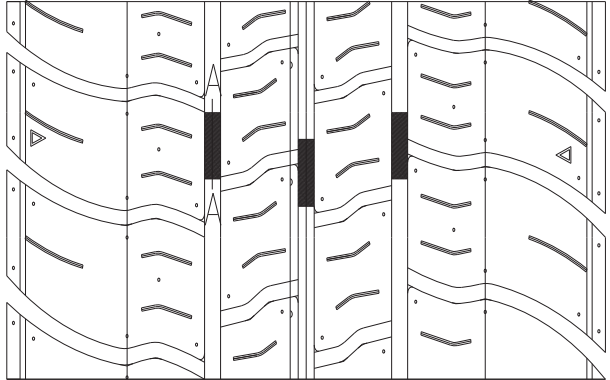


GITI TIRE (ANHUI) COMPANY LTD.

Information folder No. s120701

Page 4 of 5

Drawing of the tread pattern (for measured tyre)

Manufacturer name Pattern name Tyre Size Market	GITI TIRE (ANHUI) COMPANY LTD. KargoMax ST-6000 195/60R12C 104/102N EU
Pitch number Pitch ratio	50 1.00/1.12/1.26
Void volume [%] Width: main grooves [mm] Depth: center groove [mm] Depth: shoulder groove [mm]	78 6.5/6.5 7.7 6.2
Pattern	

GITI TIRE (ANHUI) COMPANY LTD.

Information folder No. s120701

Page 5 of 5

Drawing of the tread pattern (for measured tyre)

Manufacturer name	GITI TIRE (ANHUI) COMPANY LTD.
Pattern name	KargoMax ST-6000
Tyre Size	225/75R16C 121/120N
Market	EU
Pitch number	63
Pitch ratio	1.00/1.20/1.40
Void volume [%]	79
Width: main grooves [mm]	6.8/6.7
Depth: center groove [mm]	8.2
Depth: shoulder groove [mm]	6.7
Pattern	